


# DGP 306 話機號碼異動操作教學

## 1. 透過網頁瀏覽器連線到話機 IP

範例：學校話機使用的 IP 為 192.168.1.23

則在瀏覽器輸入 `http://192.168.1.23:9999`


※查詢話機 IP 可由話機上的 **MENU** 按鍵查詢。

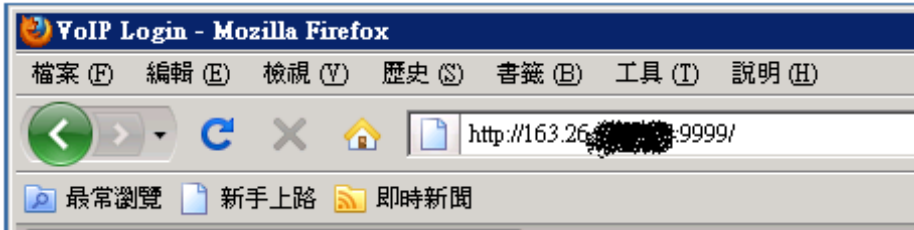

## 2. 輸入話機帳號密碼


Username : root

Password : test

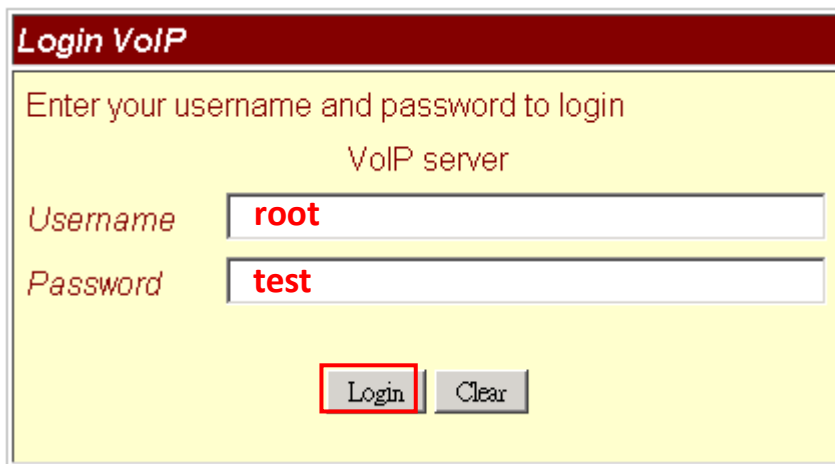A screenshot of the "Login VoIP" web form. The form has a yellow background and a red header. It contains the text "Enter your username and password to login" and "VoIP server". There are two input fields: "Username" with the value "root" and "Password" with the value "test". Below the fields are two buttons: "Login" (highlighted with a red box) and "Clear".

## 3. SIP Setting

登入後畫面如下，點選左邊功能表選單的「SIP Setting」

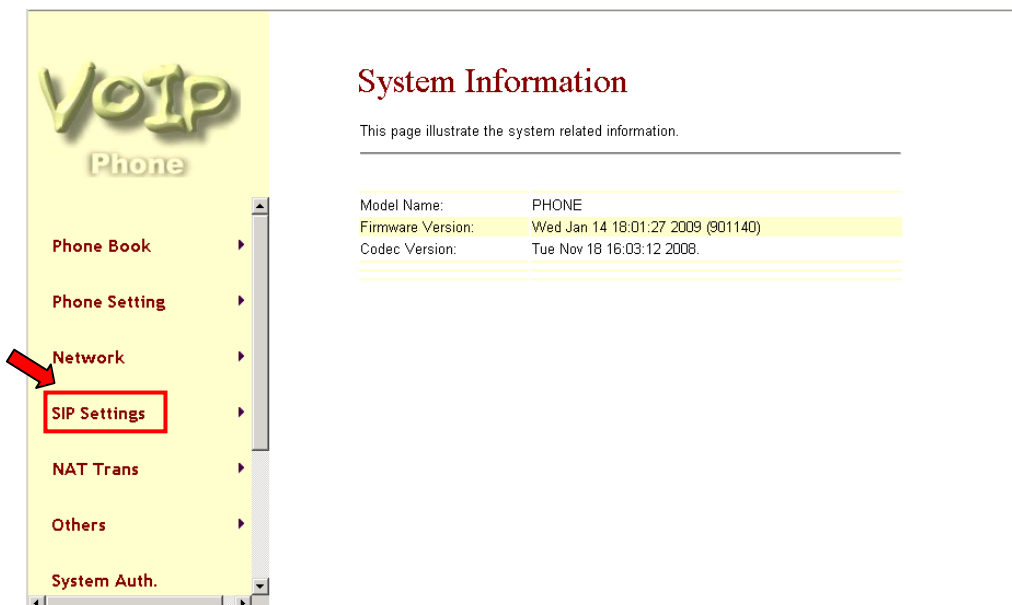



## 5. 儲存設定

點選左邊功能表「Save Change」，接著再點選右邊的「Save」按鈕，話機即會自動重新開機。



按下 Save 後，話機會自動重新開機。

## Note Information

This page inform user important information.

**Configure OK.**

System will reboot automaitcally to effect those changes and please wait for a moment while rebooting....

## 6. 話機更改完成

話機重開之後，請連到

<http://voip.tn.edu.tw> 點選「查號台」、「業務網路電話查詢 or 班級網路電話查詢」

因為單位太多，下拉式選單不容易找，建議輸入關鍵字(如七股國小) 再點選"搜尋"，即可查看目前學校話機的註冊狀態。